




EP04/12245



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

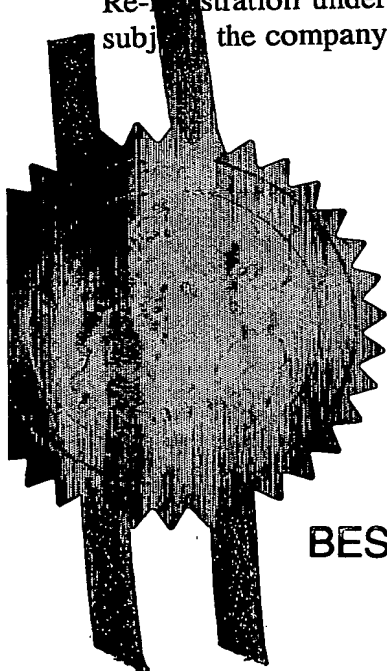

Signed

Dated 6 October 2004

**PRIORITY**  
**BEST AVAILABLE COPY DOCUMENT**



SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The  
Patent  
Office

43AUG04 E915963-1 002078  
P01/7700 0.00-0417227.6 ACCOUNT CHA

Patents Act 1977  
(Rule 16)

3 AUG 2004

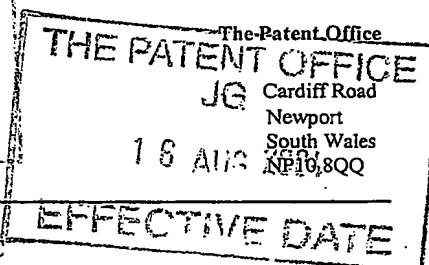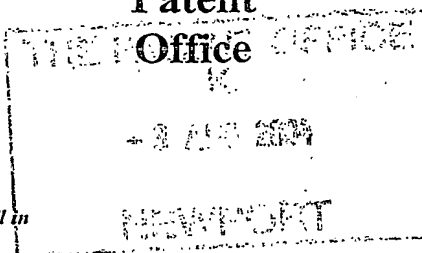

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference C4390 (C)/TC

2. Patent application number 0417227.6  
(The Patent Office will fill this part in)

3. Full name, address and postcode of the or of each applicant (underline all surnames) UNILEVER PLC  
UNILEVER HOUSE, BLACKFRIARS  
LONDON, EC4P 4BQ

Patents ADP number (if you know it) 50426956002 ✓

If the applicant is a corporate body, give the country/state of its incorporation UNITED KINGDOM

4. Title of the invention FABRIC CLEANING FLUID AND  
DISPENSING DEVICE

Name of your agent (if you have one) ELLIOTT, Peter William

"Address for Service" in the United Kingdom to which all correspondence should be sent (including the postcode) PATENT DEPARTMENT, UNILEVER PLC  
COLWORTH HOUSE, SHARNBROOK  
BEDFORD, MK44 1LQ

Patents ADP number (if you know it) 08874653001 ✓

Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.	Country	Priority application number	Date of filing
		(if you know it)	(day / month / year)

Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)	Number of earlier application	Date of filing
		(day / month / year)

Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

Answer YES if:


- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- Otherwise answer NO (See note d)

YES

**Patents Form 1/77**

Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description	15
Claim(s)	2
Abstract	1
Drawing(s)	2 + 2 

10. If you are also filing any of the following, state how many against each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

Date: 02/08/04

Alain HUGOT, Authorised Signatory

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

Trudi Clark (01234) 22 2360  
trudi.clark@unilever.com

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- i) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- o) Write your answers in capital letters using black ink or you may type them.
- o) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- 1) If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- o) Once you have filled in the form you must remember to sign and date it.
- o) Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

FABRIC CLEANING FLUID AND DISPENSING DEVICE

The present invention relates general to a dispensing device dispensing a fabric cleaning fluid having a high viscosity i.e. a viscosity over 10 Pa.s at rest or under an applied stress of up to 10 Pa.

It is an object of the present invention to provide an improved dispensing device for dispensing fabric cleaning fluids having a viscosity over 10 Pa.s at rest or under an applied stress of up to 10 Pa.

According to the present invention, there is provided a dispensing device comprising:

- (a) a reservoir for storing a fabric cleaning fluid having a viscosity over 10 Pa.s at rest or under an applied stress of up to 10 Pa;
- (b) one or more dispensing orifices in fluid communication with the reservoir;
- (c) a movable platform movable by means of a screw mechanism, whereby rotation of a screw advances the movable platform against the stored fabric cleaning fluid thereby dispensing a metered dose of the cleaning fluid from the reservoir to be dispensed via the dispensing orifices.

All viscosity values and ranges referred to herein are measured at 25 degrees celcius.

An advantage of a screw mechanism is that the quantity of fluid delivered is controlled by the screw feed ie. it is directly proportional to the amount by which the screw is

directly proportional to the amount by which the screw is rotated and not dependent on the viscosity of the fluid. This is in contrast with eg. pump dispensing devices. Hence even very high viscosity fluids e.g. pastes can be dispensed accurately using the invention.

The fabric cleaning fluid may be a non-newtonian, shear-thinning liquid having viscosity profile such that from rest and up to an applied shear stress of 10 Pa the viscosity of the fluid is at least 100 Pa.s and under a shear field of 20  $s^{-1}$  of at most 5 Pa.s. The viscosity of the fluid may be at least 300 Pa.s or may be at least 500 or at least 1000 or at least 10,000 under a shear field of 20  $s^{-1}$  of at most 5 Pa.s.

The dosing accuracy is not compromised by shear-thinning properties which some cleaning solutions exhibit. Shear thinning gel-type detergent compositions are desirable for a number of reasons. For example they are generally suitable for stable suspending particles therein, since they usually have adequate viscosity when in rest or under very low shear. On the other hand, owing to their shear thinning properties, such gel-type compositions have much lower viscosity when under increased shear.

The pitch of the screw is preferably constant so that the amount of fluid dispensed per turn of the screw remains throughout use constant.

The term "fluid" herein is intended to include a liquid, gel, and paste e.g. pastes formed from a solid cleaning

product e.g. cleaning/detergent powder, granules, flakes, tablets (which may be crushed), pellets together with a solvent, e.g. water.

- 5 The device may further comprise a scrubbing member for scrubbing the fabric.

With this arrangement the device can be used as a hand wash or pretreatment device, eg. prior to a main wash process as  
10 in an automatic washing machine. The device may be a hand held device which hold a limited number of doses, e.g. 1 to 10 of the fluid, so that it is refilled from a larger consumer pack.

- 15 One advantage of using such high viscosity fluids within such a device is that they are less likely to leak when the device is set down after use. So that it does not necessarily require storage an upright position or with a closure device to prevent leakage.

20 Preferably, the external surface of the scrubber member is abrasive. To this end the scrubbing member may comprise a coarse mesh structure. Alternatively or additionally, the scrubbing member may comprise one or projections, such as  
25 finger-like 'villi' or ribs. The scrubbing member may be formed from a rigid material, so that if a mesh or projections are stiff to provide effective scrubbing. However, for delicate fabrics, more flexible scrubbing materials can be used. The scrubbing member may comprise a  
30 plurality of scrubbing surfaces to offer the user a choice. In this way a varied washing load (with both delicate and

more harder wearing fabrics) can be treated without the need for multiple tools.

5 The movable platform may comprise a side wall or base wall of the reservoir, whereby moving e.g. sliding the platform within the reservoir, progressively decreases the reservoir volume which compresses the cleaning composition thereby forcing it to exit the reservoir via the dispensing orifice/s.

10 The screw mechanism may comprise an elongate member, e.g. a cylindrical shaft which is externally threaded and attached to the platform at a first end and attached to a internally threaded actuator at the other end. Preferably the actuator  
15 is fixed within the device except to allow only rotation relative to the externally threaded member by the user. In this way rotating the actuator rotates the screw the screw which in turn moves the platform axially relative to the screw.

20 The scrubbing member may be in fluid communication with the dispensing orifices, such that as the cleaning fluid exits ~~the reservoir it is exposed on the exterior surface of the~~ scrubbing member.

25 The scrubbing member may be positioned adjacent the dispensing orifice/s, externally of the reservoir such that there is a gap there between which can be filled with fluid. The scrubbing member may form a cage like structure which  
30 envelopes a portion of the reservoir, including the orifice/s.

The scrubbing member may include an orifice or orifices to allow the dispensed fluid to reach the external abrasive surface. The orifice(s) of the scrubber may be provided by a material having a mesh structure e.g., the apertures of the mesh providing multiple dispensing orifices. The mesh may be abrasive to provide a scrubbing surface.

The reservoir is preferably fillable and refillable with cleaning fluid or components thereof (e.g. detergent powder and water) by the user. To this end, the reservoir preferably has a removable (e.g. by a screw fitting or snap-fit arrangement) portion to allow access. This may be a cap which may be attached to the scrubbing means, such that both are removed to fill/refill the reservoir with cleaning fluid. Alternatively the scrubbing member alone may be the removable portion.

The device may comprise a tubular body including a tubular reservoir axially aligned with a elongate screw member. The platform may be configured for reciprocal movement so that under release of the force i.e. by opposite turn of the screw the platform moves in a reverse direction. This can be used to relieve residual stress in the fabric cleaning fluid (for interim storage purposes).

Preferably the platform has a peripheral edge which is configured to slide in a sealing relationship with an inner surface of the reservoir, whereby sliding is guided by said inner surface. The peripheral edge may be flexible to provide such a sealing relationship.



With this arrangement, the device can be used both to store and dispense cleaning fluid with minimal or no leakage via the moving platform.

- 5 The device may be shaped e.g. the exterior surface may have one or more recesses or indentations for ergonomic purposes, to ease the handling and gripping of the device during use.

10 In addition, according to a second aspect of the invention there is provided a method of dispensing a fabric cleaning fluid having a viscosity over 500 Pa.s. using the device according to the first aspect of the invention (and optional features as described above).

15 the method comprising the steps of:

- (a) filling the reservoir with the fluid, optionally obtained by mixing a solid cleaning composition e.g. powder, granules, and a solvent e.g. water to form a cleaning fluid having a viscosity over 500 Pa.s within  
20 the reservoir,
- (b) securing a removable portion e.g. end cap and scrubbing member on the device to close the reservoir
- ~~(c) moving the platform e.g. by rotating the screw mechanism~~  
dispense to force a metered dose of the cleaning fluid  
25 from the reservoir.

The device may incorporate a scrubbing member in which case the dispensed fluid may be exposed on the exterior of the scrubbing means and the fabric cleaned by scrubbing with  
30 said scrubbing means.

The device of the invention may be supplied as a commercial package including (a) a cleaning fluid and/or

(b) a cleaning solid for mixing with a solvent to prepare a cleaning fluid having a viscosity of over 10 Pa.s at rest or

5 under an applied stress of up to 10 Pa.

(c) instructions to direct the user to use the package according to the method of the second aspect of the invention.

10 Exemplary formulations for the cleaning fluid

		Wt %	
Component:		A	B
	Propylene glycol	8.0	8.0
15	sodium citrate	3.9	3.9
	Borax	3.0	3.0
	NaOH (50%)	1.1	1.1
	Monoethanolamine	1.0	1.0
	LAS-acid	4.4	4.4
20	Coconut fatty acid	1.5	1.5
	Nonionic surfactant	11.1	11.1
	Oleic acid	2.3	2.3
	1-Dodecanol	5.0	0.0
	Protease enzyme	0.3	0.3
25	Lipase enzyme	0.5	0.5
	Perfume	0.2	0.2
	Water	balance	balance
		to 100	to 100

30 wherein:

Borax : Sodium tetraborate (10aq)

nonionic surfactant: ethoxylated alcohol with on average 9 ethylene oxide groups.

The gel detergent composition exemplified by composition A was found to be shear thinning and stable. Typical detergent particles of density between 0.8 and 0.9 g/cm<sup>3</sup> and having a diameter up to 5000 microns could be stable suspended in this composition for more than 2 weeks without any observable net movement of the particles.

The non-gelled comparative detergent composition exemplified by composition B differed from composition A only in the absence of the fatty alcohol (i.e. 1-dodecanol). Composition B was found to be a clear, stable, Newtonian isotropic liquid. Critical rheological properties of the two are given below

Sample	Viscosity / Pa.s		Eta 0 Pa.s	Critical Stress Pa	Tan Delta at 1 Hz
	20s-1	100s-1			
A	2.11	0.61	3.00E+05	15	0.04
B	0.88	0.86	0.89	0.001	57

#### Example 2

20

WT %

Component:		C	D
Propylene glycol		4.75	4.75
sodium citrate		2.8	2.8
Borax		2.3	2.3
NaOH (50%)		0.43	0.43
Monoethanolamine		0.23	0.23
LAS-acid		6.0	6.0
Coconut fatty acid		0.77	0.77

	Sodium alcohol EO sulphate	10.5	10.5
	Nonionic surfactant	6.6	6.6
	1-Decanol	6.0	0.0
	Protease enzyme	0.45	0.45
5	Lipase enzyme	0.25	0.25
	Perfume	0.2	0.2
	Water	balance	balance
		to 100	to 100

wherein:

- 10 Borax : Sodium tetraborate (10aq)  
 nonionic surfactant: ethoxylated alcohol with on average 9  
 ethylene oxide groups  
 Sodium alcohol EO sulphate: ethoxylated alcohol sulphate  
 with on average 3 ethylene oxide groups.

- 15 As in example 1, the two compositions, C and D, shown above  
 differ only in that composition C contains 6% fatty alcohol  
 (1-Decanol) and composition D does not. Composition C was  
 found to be a stable, transparent, pourable shear thinning  
 20 gel while composition D was found to be a stable, clear,  
 Newtonian isotropic liquid. Composition C was found to be  
 capable of stable suspending typical detergent particles  
 having a density of between 0.8 and 0.9 g/cm<sup>3</sup> and a diameter  
 of up to 5000 microns, for more than 2 weeks without any  
 25 observable net movement of the particles.

Critical rheological parameters for the two compositions are  
 shown below.

Sample	Viscosity / Pa.s		Eta 0 Pa.s	Critical Stress Tan Delta	
	20s-1	100s-1		Pa	at 1 Hz
C	1.33	0.48	9.85E+05	10	0.07
D	0.29	0.29	0.29	0.001	57

For clarification of the rheological values shown in this table, reference is made to the description concerning the similar table shown in above example 1.

5 *Critical rheological properties of the two are given below*

Sample	Viscosity / Pa.s		Eta 0 Pa.s	Critical Stress Pa	Tan Delta at 1 Hz
	20s <sup>-1</sup>	100s <sup>-1</sup>			
A	2.11	0.61	3.00E+05	15	0.04
B	0.88	0.86	0.89	0.001	57

For obtaining the values shown in the above rheological properties tables, all rheological measurements were carried out at 25 °C using a Carrired CSL100 rheometer with a cone and plate geometry specially roughed to prevent slip.

Viscosity was measured at varying shear rates from very low shear up to a shear regime in excess of 100 s<sup>-1</sup>. Two situations are shown: the viscosity measured at relatively low shear (20 s<sup>-1</sup>) and that measured at much higher shear (100 s<sup>-1</sup>). It can be seen that the viscosity of composition A at high shear is much lower than that obtained at low shear, whereas composition B shows almost equal viscosity's for high and low shear. In other words compositions A and C is

~~clearly shear thinning, whereas compositions B and D is not.~~

In addition, the critical stress is shown. This parameter represents the stress at which the material leaves the upper Newtonian plateau and thins under increasing shear.

Also, "Eta 0"-values are shown, referring to the viscosity calculated for zero shear from creep flow measurements.

Finally, "Tan delta" values are shown, referring to the ratio of loss over storage moduli (G''/G') and reflecting the dominance of viscous over elastic properties such that

materials giving very low "Tan delta"-values (tending to zero, such as compositions A and C, will be much more elastic than those giving higher "Tan delta" values (tending to 90).

5

Various non-limiting embodiments of the invention will now be more particularly described with reference to the following figures in which:

- 10 Figure 1 is a perspective view of one embodiment according to one aspect of the invention;  
Figure 2 is a side sectional view of the embodiment shown in figure 1, with the platform in a fully lowered position;  
Figure 3 is a side sectional view of the embodiment shown in  
15 figure 1, with the platform in a fully raised position; and  
Figure 4 is a enlarged and exploded perspective view of the screw feed mechanism of figure 1.  
Figure 5 is a perspective view of a second embodiment according to one aspect of the invention.  
20 Figure 6 is a side sectional view of the embodiment shown in figure 5.

Common reference numerals are used in all figures to identify features common to all embodiments.

25

Referring to figures 1-3, there is illustrated a fabric cleaning fluid dispensing device 1 comprising:

- (a) A reservoir 3 located with a housing 29, the reservoir  
30 3 for storing the fabric cleaning fluid 9 having a viscosity of greater than 500 Pa.s.

- (b) a dispensing orifice B in fluid communication with the reservoir 3;
- (c) a movable platform 11 moveable by means of a screw mechanism 19 (shown in detail in figure 4).

5

The movable platform 11 is generally hexagonal (in plan view) and forms the base portion of the reservoir 3, which is also hexagonal in cross section. In this way the platform 11 cannot rotate relative to the reservoir. Thus  
10 sliding the platform 11 axially upwards within the reservoir 3, progressively reduces the reservoir volume.

The reservoir 3 is refillable with the fabric cleaning fluid 9 or components thereof (e.g. detergent powder and water) by  
15 the user. To this end, the reservoir has a removable by a water-tight, screw-fitting (not shown) end piece 15 made from HDPE (high density polyethylene). The end piece 15 can be removed to refill/mix the reservoir with fabric cleaning fluid 3 and then re-secured. As the removable end  
20 piece 15 forms the roof of the reservoir. The dispensing orifice 13 is located centrally of the end cap 15.

---

~~The housing 29 has a head portion 29a which has an enlarged diameter which improves handling.~~

25

The platform 11 is configured for precise reciprocal axial movement within the reservoir 3.

30 Axial movement of the platform is effected by a worm drive screw mechanism 19 (shown more clearly in figure 4). This comprises a two-piece shaft 25, 27 and actuator 21. The two

sections of the shaft are screwed together by respective internal and external threads on shafts 25 and 27. Shaft 27 is fixed to underside 11b of the platform 11. Shaft 25 is fixed to actuator by a screw fastening (in opposite direction that joins shafts 25 and 27). Turning the screw actuator 21 in one direction advances the platform 11 a set distance upward within the reservoir. In this way the reservoir volume is decreased and the fluid forced to exit via the dispensing orifices.

10

The cleaning fluid 9 can therefore be dispensed in a controlled manner. The screw mechanism does not protrude into the reservoir, for sealing purposes.

15 By unscrewing the mechanism 19 the platform 11 can slidably move in a reverse direction to relieve any residual stress in the fabric cleaning fluid 9.

20 The platform has a peripheral edge 11a which butts against the inner surface 17 so that it slides in a sealing relationship with the inner surface 17. With this arrangement, the device can be used both to store and dispense cleaning fluid with minimal or no leakage via the moving platform.

25

The screw actuator 21 is fixed to the base 31 of the device such that both rotate together as a single unit relative to the housing 29 (and reservoir 3).

30 The external surface of the base has an annular band of recesses and protrusions 23 for ergonomic purposes, to ease



the handling and especially to allow for improved gripping of the base during rotation (ie. for dispensing purposes) which is advantageous especially if the device gets wet.

5 In use the reservoir is filled with cleaning fluid, optionally obtained by mixing a solid cleaning composition e.g. powder, granules, and a solvent e.g. water to form a cleaning fluid or paste within the reservoir. The end piece 15 is then screwed on tightly to the device to close the  
10 reservoir. The platform 11 is advanced from a lowered state (fig2) towards a raised state (fig 3) by turning a screw-feed mechanism 19 to force the cleaning fluid 9 from the reservoir 3 to egress via orifice 13 in a controlled manner.

15 There may be visual eg. indicating the number of turns of the base per unit dose indicia on the reservoir having dosing quantities to assist the user. Alternatively or additionally the user can dispense the fluid into a machine drawer, shuttle etc according to dose instruction thereon.

20 The device further includes a cap 33 which snap-fits to the top of the housing as a further measure preventing leakage between use. (Cap only shown in fig 2).

---

25 The second embodiment shown in figures 5 and 6 is constructed according to the above description except in that it also includes a scrubbing member 5 which is fixed over the top wall of the reservoir and forms a cage like structure adjacent the dispensing orifice 13. The scrubbing  
30 member 5 comprises a coarse, rigid HDPE (high density

polyethylene) mesh, the apertures of which provide orifices 35 through which the fluid passes.

5 In use, the cleaning fluid is dispensed as described for the first embodiment. The dispensed fluid passes from the orifice 13 to the scrubbing member orifices (shown schematically and referenced 35) to be exposed on the external surface of the scrubbing member for cleaning purposes.

10

Dosage advice and instructions may be provided as per the first embodiment.

15 It is of course to be understood that the invention is not intended to be restricted to the details of the above embodiments which are described by way of example only.

CLAIMS

1. A dispensing device comprising:

(d) a reservoir for storing a fabric cleaning fluid having  
5 a viscosity of over 10 Pa.s at rest or under an applied  
stress of up to 10 Pa.

(e) one or more dispensing orifices in fluid communication  
with the reservoir

a movable platform movable by means of a screw mechanism,  
10 whereby rotation of a screw advances the movable platform  
against the stored, fabric cleaning fluid thereby dispensing  
a metered dose of the cleaning fluid from the reservoir to  
be dispensed via the dispensing orifices.

15 2. A device according to claim 1 wherein the platform  
comprises a wall or base portion of the reservoir and  
sliding the platform within the reservoir, progressively  
reduces the volume of the reservoir thereby forcing the  
fluid to exit the reservoir.

20 3. A device according to any preceding claim in which  
the reservoir and movable platform are non-circular in cross  
~~section, such that, in use, rotation of the reservoir~~  
relative to the platform is resisted.

25 4. A device according to any preceding claim in which the  
cross section of the reservoir and platform include at least  
one non-curved section.

30 5. A device according to any preceding claim in which

the reservoir is uniform in cross section at least along the length in which the platform moves.

5 6. A device according to any preceding claim in which the platform is configured for reciprocal generally axial movement internally of the reservoir.

7. A device according to any preceding claim in which the platform is movable by means of screw mechanism.

ABSTRACT

a dispensing device comprising a reservoir for storing a fabric cleaning fluid having a viscosity of over over 10 Pa.s at rest or under an applied stress of up to 10 Pa, one  
 5 or more dispensing orifices in fluid communication with the reservoir, a movable platform movable by means of a screw mechanism, whereby rotation of a screw advances the movable platform against the stored, fabric cleaning fluid thereby dispensing a metered dose of the cleaning fluid from the  
 10 reservoir to be dispensed via the dispensing orifices.

---

FIG 1

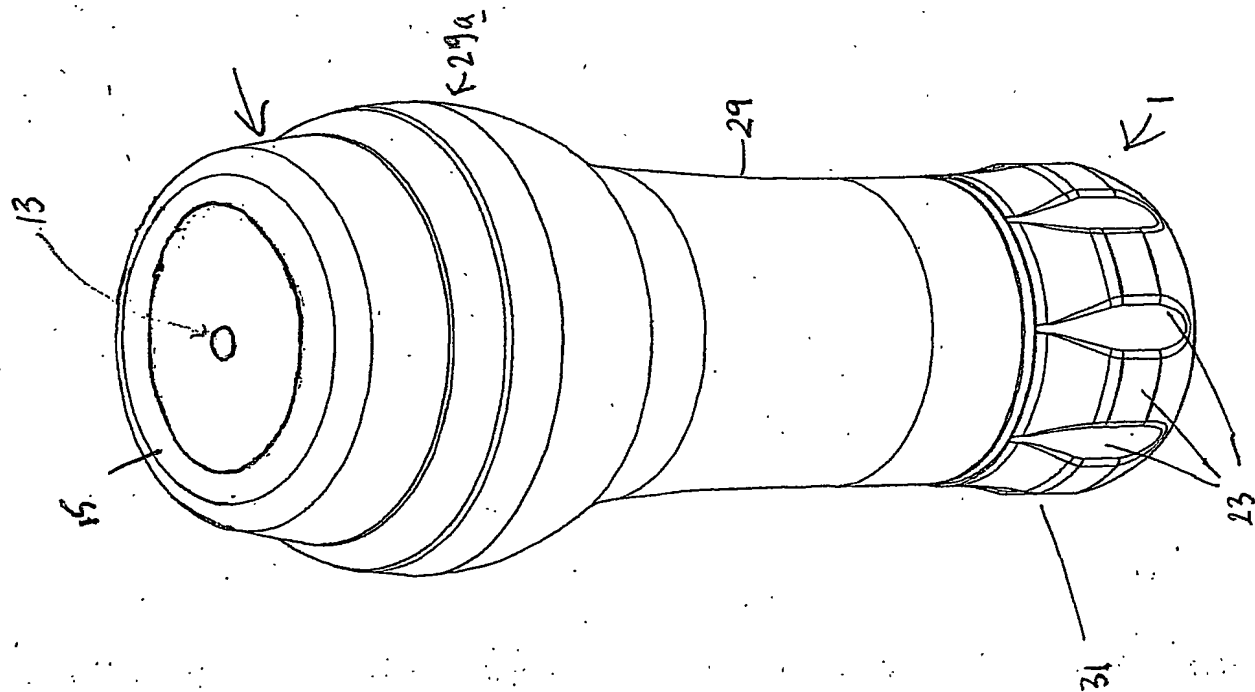


FIG 2


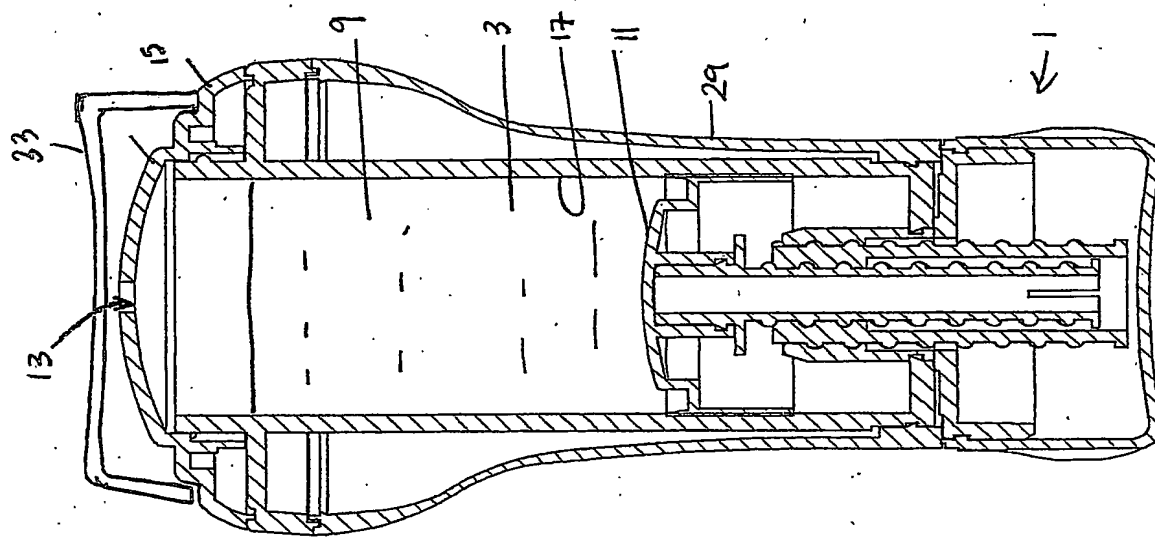


FIG 3

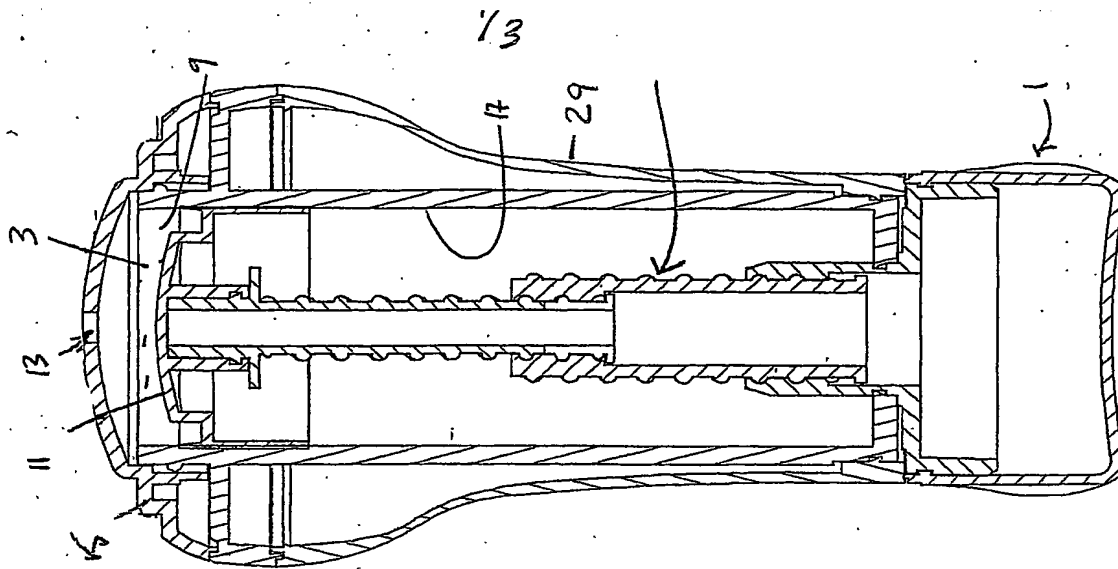

2/3

Fig 4

19

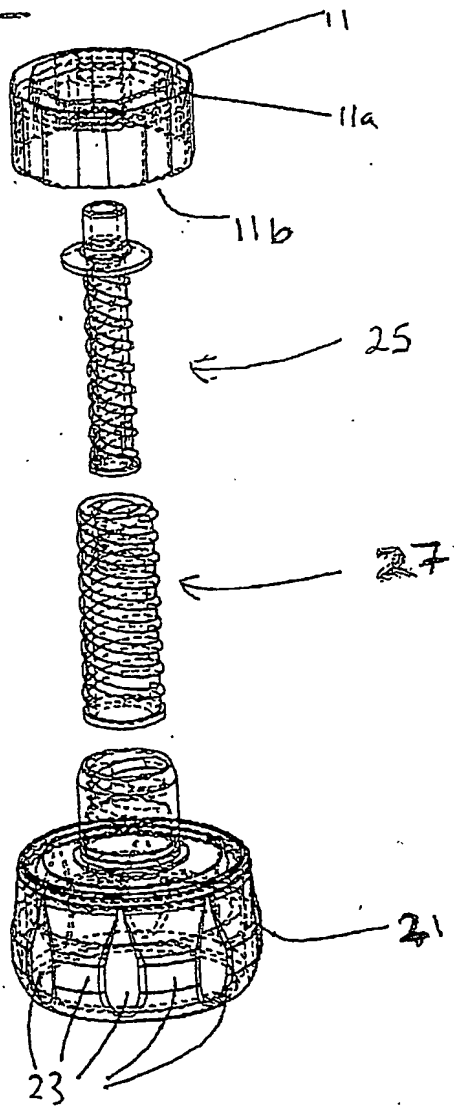


FIG 5


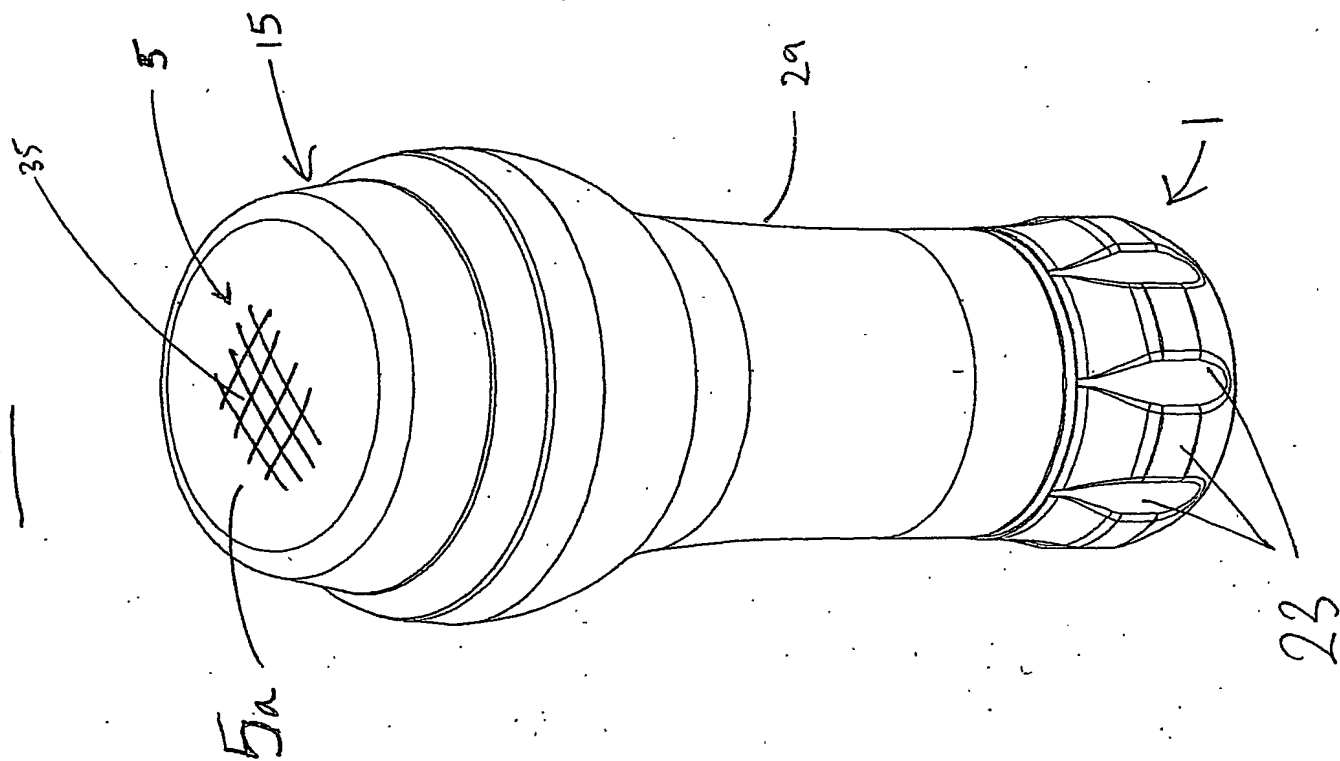


FIG 6



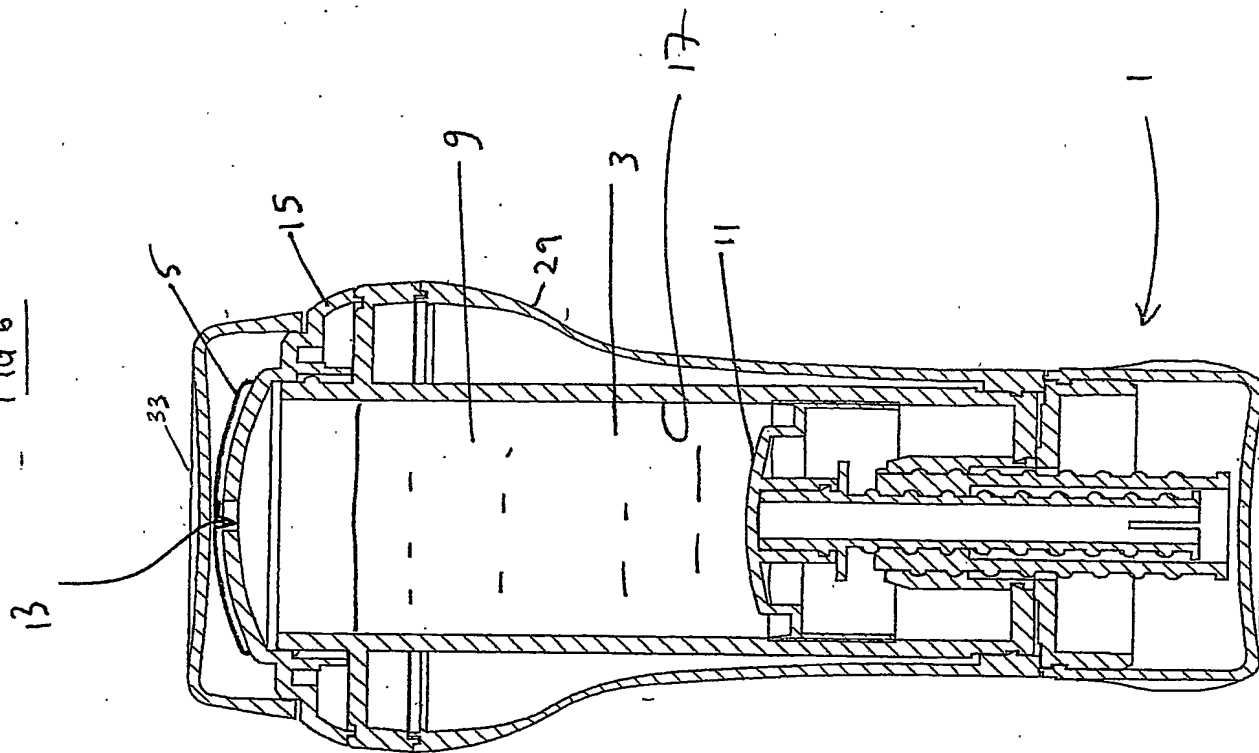

8  
92

PCT/EP2004/012245



**This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record.**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**